

# QXring


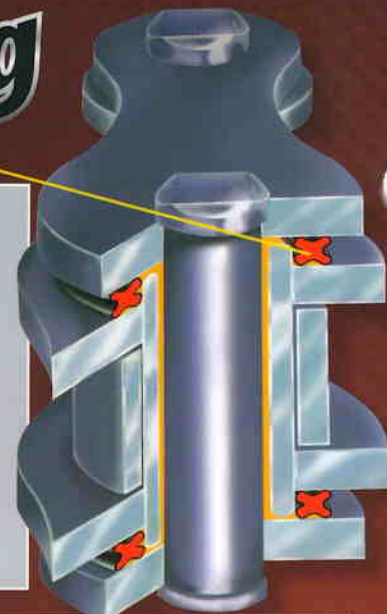



Plate colour	Connecting link			Seal ring type	Bush type	cc	Pitch	Width	Roller diam.	Pin diam.	Plate Thickness int./ext. T/t mm	Plate Height h/H mm	L1 max mm	L2 max mm	Tensile strength ATS		Weight per 100 links kg	
	Standard in box	optional													daN	Lbs		
		CL	CLT															PL
DC415F	steel	CL	•	•	no	curled	50	12,7	4,88	7,75	4,07	1,6/1,8	9/9,9	14,6	15,7	1700	3825	0,64
DC415GPR-G*	gold	PL	•	•	no	solid	125	12,7	4,88	7,77	3,96	1,5	10,4/12	13,2	14,3	2050	4613	0,70
DC420D	steel	CL	•	•	no	solid	50	12,7	6,35	7,75	3,98	1,5	10,4/12	14,4	15,5	2000	4500	0,72
DC420HD	steel	CL	•	•	no	solid	85	12,7	6,35	7,75	3,98	1,8	10,4/12	16,2	17,2	2100	4725	0,86
DC420SH-G	gold	CL	•	•	no	solid	85	12,7	6,35	7,75	3,96	2	10,4/12	17,5	18,5	2400	5400	0,92
DC420MO	steel	CLT	•	•	0-ring	curled	85	12,7	6,35	7,75	3,96	1,5	10,4/12	17	18	1900	4275	0,79
DC428D	steel	CL	•	•	no	solid	125	12,7	7,75	8,51	4,45	1,5	10,4/11,7	16,3	17,3	2000	4500	0,85
DC428HD	steel	CL	•	•	no	solid	125-200	12,7	7,75	8,51	4,45	1,8	10,4/11,7	18,4	19,4	2400	5400	0,99
DC428MDX-G	gold	CLT	•	•	no	solid	125	12,7	7,75	8,51	4,50	1,8	10,4/12	19	20	2200	4950	1,02
DC428MTX	steel	CL	•	•	QX-ring	solid	100-200	12,7	7,75	8,51	4,45	1,8	11,8	20,1	20,5	2200	4950	1,03
DC428MSO	steel	PL	•	•	0-ring	solid	250-400	12,7	7,75	8,51	4,50	2	10,4/12	21,7	22,4	2450	5513	1,10
DC520D	steel	CL	•	•	no	solid	125-250	15,88	6,35	10,16	5,08	2	13/15	16,6	17,7	3100	6975	1,42
DC520R3	steel	CL	•	•	no	solid	125-400	15,88	6,35	10,16	5,24	2	12,9/15	18,9	19,8	3400	7650	1,62
DC520R3-G	gold	CL	•	•	no	solid	125-400	15,88	6,35	10,16	5,24	2	12,9/15	18,9	19,8	3400	7650	1,63
DC520MXL2-G*	gold	CLT	•	•	no	solid	125-450	15,88	6,35	10,16	5,24	2	11/13	16,8	18,8	2940	6615	1,29
DC520MDX6-G*	gold	CLT	•	•	no	solid	250-500	15,88	6,35	10,16	5,24	2	13/15	16,8	18,8	3770	8483	1,51
DC520MRX-G	gold	CLT	•	•	no	solid	450-650	15,88	6,35	10,16	5,24	2,2	13/15	19,2	20,4	4100	9225	1,61
DC520MCX	steel	CL	•	•	QX-ring	solid	125-400	15,88	6,35	10,16	5,24	2	15/15	19,9	20,7	3300	7425	1,63
DC520MTX	steel	PL	•	•	QX-ring	solid	250-650	15,88	6,35	10,16	5,24	2,4	15/15	21,4	22,3	3800	8550	1,90
DC520MXO	steel	CLT	•	•	QX-ring	solid	125-650	15,88	6,35	10,16	5,24	2	13/15	20,1	21,3	3290	7403	1,58
DC520MXX-G	gold	PL	•	•	QX-ring	solid	125-650	15,88	6,35	10,20	5,38	2	13/15	20,3	21,4	3630	8168	1,59
DC520MZO	steel	PL	•	•	QX-ring	solid	400-750	15,88	6,35	10,20	5,38	2,2	13/15	21,2	22,3	3630	8168	1,70
DC520MZX-G	gold	PL	•	•	QX-ring	solid	500-900	15,88	6,35	10,20	5,38	2,2	15/15	21,2	22,3	4140	9315	1,83
DC520RXO-G	gold	PL	•	•	QX-ring	solid	750-1000	15,88	6,35	10,20	5,38	2	13/15	20,5	na	3920	8820	1,60
DC525MTX	steel	PL	•	•	QX-ring	solid	250-650	15,88	7,85	10,16	5,24	2,4	15/15	23,3	24,1	3850	8663	1,99
DC525MZO	steel	PL	•	•	QX-ring	solid	250-750	15,88	7,85	10,16	5,38	2,2	13/15	22,7	23,8	3630	8168	1,78
DC525MZX-G	gold	PL	•	•	QX-ring	solid	500-1000	15,88	7,85	10,16	5,38	2,4	15/15	23,1	24,2	4410	9923	2,06
DC530HR	steel	PL	•	•	no	solid	250-600	15,88	9,53	10,16	5,24	2,2	13/15	22,6	23,4	3530	7943	1,80
DC530MTX	steel	PL	•	•	QX-ring	solid	250-650	15,88	9,53	10,16	5,24	2,4	15/15	24,7	25,5	3850	8663	2,08
DC530MXO	steel	PL	•	•	QX-ring	solid	250-900	15,88	9,53	10,16	5,38	2,4	15/15	25,1	26,2	4310	9698	2,18
DC530MZO-G	gold	PL	•	•	QX-ring	solid	600-1100	15,88	9,53	10,16	5,38	2,4	15/15	25,1	26,2	4410	9923	2,18
DC530MZX-G	gold	PL	•	•	QX-ring	solid	900-1400	15,88	9,53	10,16	5,38	2,6/2,4	15/15	25,4	na	4710	10598	2,23
DC532ZVO	steel	PL	•	•	0-ring	solid	600-1100	15,88	9,53	11,10	5,64	2,4/2,6	15/15	25,4	na	4710	10598	2,32
DC630MO	steel	PL	•	•	0-ring	solid	750-1100	19,05	9,53	11,91	5,95	2,4	15,3/17,3	25,2	na	4510	10148	2,71

\*shouldered pins

## Connecting links

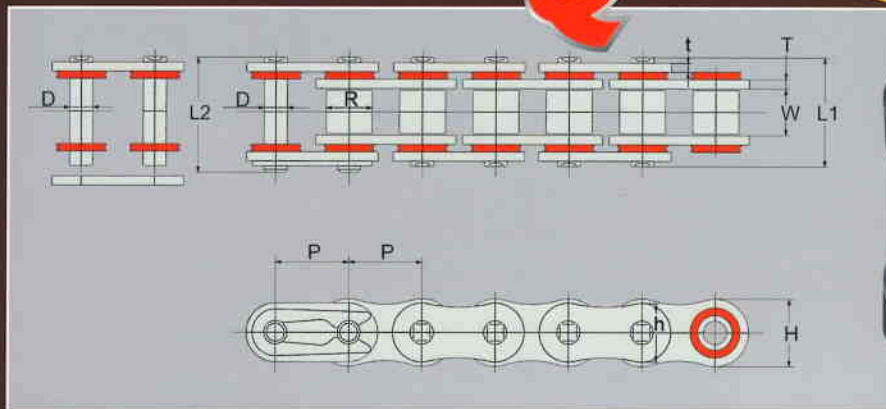

CL : Spring clip type - loose fit  
CLT : Spring clip type - press fit



PL  
Rivet link

